
INCH-POUND
MIL-PRF-32038/5
11 March 1999

PERFORMANCE SPECIFICATION SHEET

LOCKERS, CLOTHING, ENLISTED, TYPES 1 - 12


This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the furnishings described herein shall consist of this specification sheet and performance specification, MIL-PRF-32038.

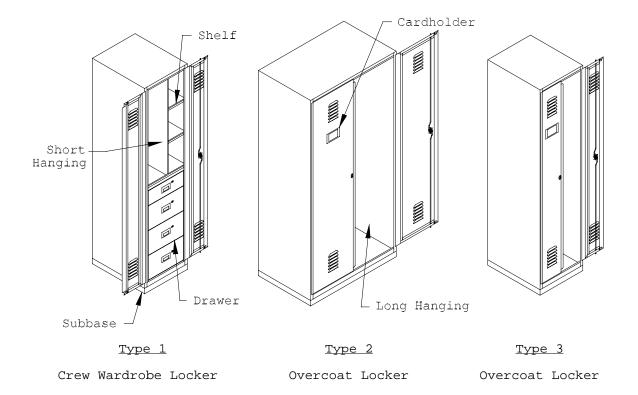

AMSC N/A FSC 2090


<u>DISTRIBUTION STATEMENT A</u>. Approved for public release; distribution is unlimited.









Type 5



Type 6

Crew Locker (2 Persons) Crew Locker (1 Person)



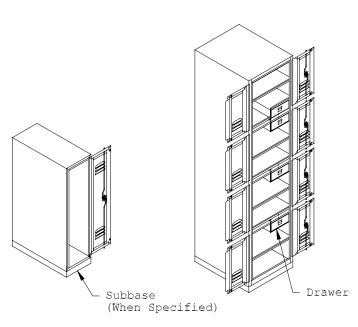


Type 7

Short Hanging Locker


Type 8

Troop Locker (4 Persons)



Type 9

Crew Locker (3 Persons)

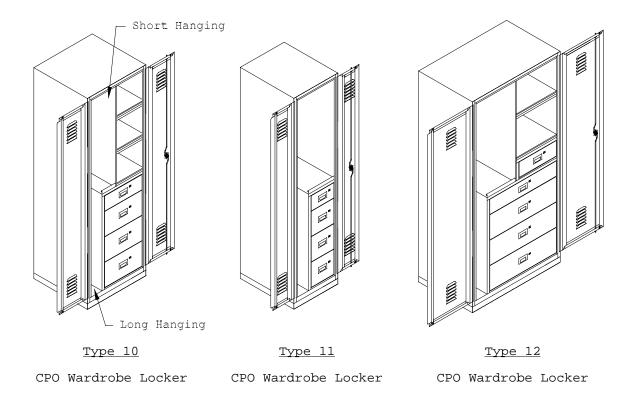

REQUIREMENTS:

- 1. Locker size and weight shall be in accordance with Table 1.
- 2. Locker stowage capacity shall be in accordance with Table II.
- 3. Top of clothes hanger rod shall be located 51 mm (2 in) below the top of the locker.
- 4. Clothes hanger rod shall be capable of supporting a hanging load of 91 kg (200 lb). The load shall be applied to the center of the clothes hanger, and shall remain in that position for 3 minutes. There shall be no indication of permanent set after removal of the load.
- 5. A cardholder shall be provided for each person's locker.
- 6. Shelves shall be provided with a 25 mm (1 in) high lip.
- 7. Label plate shall be located on the inside upper right corner of the back panel.

TABLE I. Locker size and weight

Туре	Width	Depth	Height	Weight
	mm	mm	Mm	kg
	(in)	(in)	(in)	(lb)
1	457	559	1854	43
	(18)	(22)	(73)	(95)
2	914	559	1854	38
	(36)	(22)	(73)	(83)
3	457	559	1854	28
	(18)	(22)	(73)	(62)
4	457	559	1854	43
	(18)	(22)	(73)	(95)
5	457	559	927	21
	(18)	(22)	(36-1/2)	(46)
6	457	559	1854	37
	(18)	(22)	(73)	(82)
7	254	559	1041	7
	(10)	(22)	(41)	(15-1/4)
8	457	559	1854	32
	(18)	(22)	(73)	(70)
9	635	559	1854	49
	(25)	(22)	(73)	(108)
10	610	559	1854	51
	(24)	(22)	(73)	(112)
11	457	559	1854	38
	(18)	(22)	(73)	(84)
12	914	559	1854	66
	(36)	(22)	(73)	(145)

Note: Height and weight do not include subbase.

TABLE II. Locker stowage capacity

Туре	Short Hanging(1) mm (in)	Long Hanging(2) mm (in)	Drawer Volume(3) cu m (cu ft)	Shelf Volume(3) cu m (cu ft)
1	254 (10)		0.12 (4.41)	0.11 (3.71)
2	_	914 (36)		_
3	_	457 (18)	_	_
4	_		0.07 (2.48)	0.12 (4.21)
5	_		0.07 (2.48)	0.12 (4.21)
6	457 (18)		0.12 (4.41)	_
7	254 (10)	_	_	_
8	_		0.003 (0.12)	0.07 (2.64)
9	_	_	0.05 (1.89)	0.09 (3.25)
10	305 (12)	152 (6)	0.13 (4.45)	0.12 (4.45)
11	305 (12)	152 (6)	0.08 (2.84)	_
12	305 (12)	152 (6)	0.25 (9)	0.16 (5.80)

- Notes: (1). Short hanging is a minimum of 940 mm (37 in) vertically.
 - (2).Long hanging is a minimum of 1651 mm (65 in) vertically.
 - (3).Volumes are per person.

Custodians: ARMY - AV NAVY - SH

AIR FORCE - 99

Preparing activity:

NAVY - SH (Project 2090-0109-05)